

12V | 1500A

GB50



START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

GAS & DIESEL

UP TO 7.0L GAS & 4.5L DIESEL.

Designed for gas engines up to 7 liters and diesel engines up to 4.5 liters for small diesel cars, SUVs, boats, trucks, ATVs, motorcycles and more.

USB

CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

30X

UP TO 30 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 1,500 amps. Full power to jump start a vehicle up to 30 times on a single charge.

ULTRA SAFE

SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID

WET

GEL

MF

EFB

AGM

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



POWER BUTTON

Push to turn unit "On" & "Off".



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



HOT/COLD INDICATOR

Illuminates solid or flashes red when internal temperature is too high. Illuminates solid or flashes blue when internal temperature is too low.



LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



ERROR

Illuminates Red if reverse polarity is detected.




MANUAL OVERRIDE.


Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



WHAT'S IN THE BOX

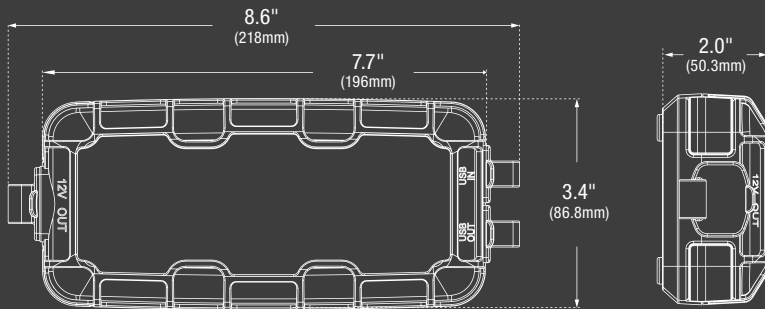

*Accessories not to scale with GB50

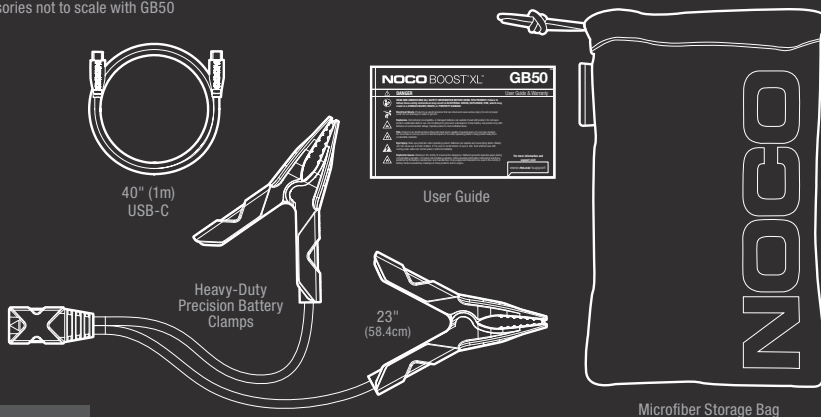

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

XGC
Extension Cable



FC RoHS



UN38.3



Intertek



Per conferma, consulta il regolamento europeo

Per conferma, consulta il regolamento europeo

Per conferma, consulta il regolamento europeo

Per conferma, consulta il regolamento europeo

Per conferma, consulta il regolamento europeo

Per conferma, consulta il regolamento europeo

Per conferma, consulta il regolamento europeo

RECHARGE TIME

0.5A	18hr
1A	9hr
2A	4.5hr

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	35 Watt-Hour Lithium Ion	
PEAK CURRENT RATING:	1500A	
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)	
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)	
USB (INPUT):	5V, 2.1A	
USB (OUTPUT):	5V, 2.1A	
HOUSING PROTECTION:	IP65 (w/Ports Closed)	
COOLING:	Natural Convection	
UNIT WEIGHT:	1.65 lbs (0.74kg)	
UNIT WEIGHT W/ CLAMPS & ACCESSORIES:	2.71 lbs (1.22kg)	
LED FLASHLIGHT:	200 Lumens	
VOLUMETRICS:	Retail Packaging: Dimensions: 3.9"x4.7"x9.1" Weight: 3.35lbs UPC: 0-46221-18017-6	Master Carton: Dimensions: 10.25"x13.5"x11.375" Weight: 22.1lbs Quantity: 6 UCC: 10046221180173
	Inner Carton: Dimensions: 4.1"x9.37"x5.27" Weight: 3.51lbs	Units Per Pallet: NA - 360 Units EU - 234 Units